



 Center of horizontal to center of splice dimension may vary, Verify before drilling holes in mounting tube. Various Routes
OVD SIN STR REP & REPL 2008-9
Various Counties
Sheet 32 of 105
Contract Number 44973

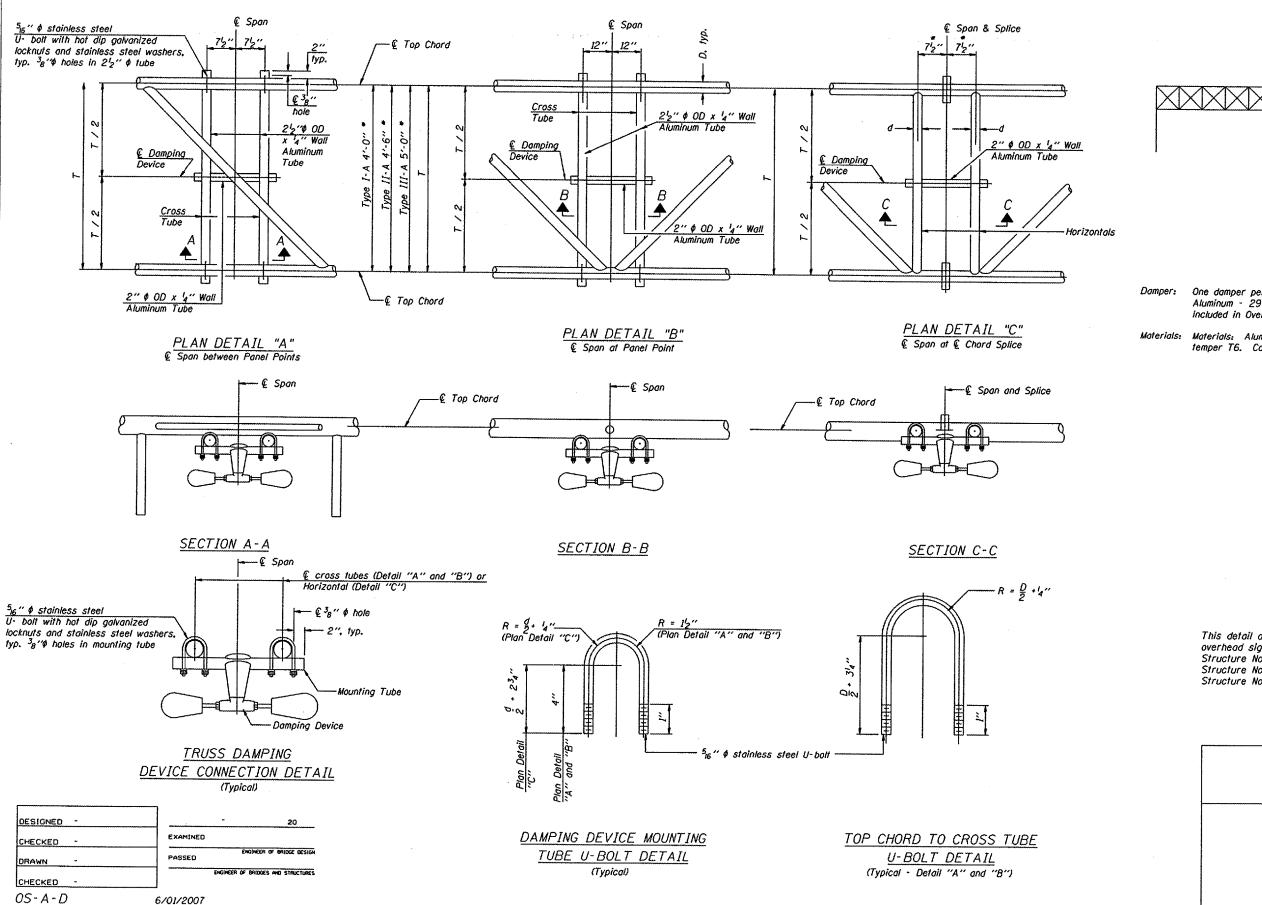

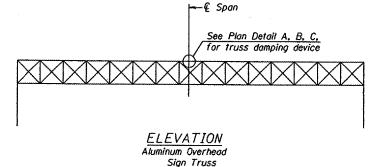

NOTES

Damper: One damper per truss. (31 lbs. minimum Stockbridge-Type Aluminum - 29" minimum between ends of weights) Cost

included in Overhead Sign Structure...

Materials: Materials: Aluminum tubes shall be ASTM B221 alloy 6061 temper T6. Cost included in Overhead Sign Structure...

This detail applies to the following overhead sign structures: Structure No: 2SIOIUO2ORO23.8 Structure No: 2SIOIUO2OLO23.1 Structure No: 2SIOIUO2OLO22.6

OVERHEAD SIGN STRUCTURE DAMPING DEVICE

District 2 Overhead Sign Structure Repair & Replacement